

THE TRUTH IS IN THE NETWORK

REVERSE ENGINEERING APPLICATION-LAYER PROTOCOLS VIA PCAP

AUGUST 9, 2018

DEF CON 26

INTRO

- Intro to security – spoofing santa@thenorthpole.com to myself via CLI SMTP at 13 years old
- A couple of security degrees
- Security R&D for entire career, focusing on network for last 3 years
- Love network analysis
- Personal motto: “treading the line between epiphany and apophenia”

BY THE END OF TODAY, YOU WILL…


- Understand what protocol RE is and why it matters
- RE parts of a real application!
- Look for and discover information leaks from network traffic
- Learn how to abstract and extend your detection capabilities to other apps and protocols

PROTOCOL RE – WHAT IS IT?



giphy.com

- ~~Magic~~ Discovering what's higher up the protocol stack from TCP/UDP

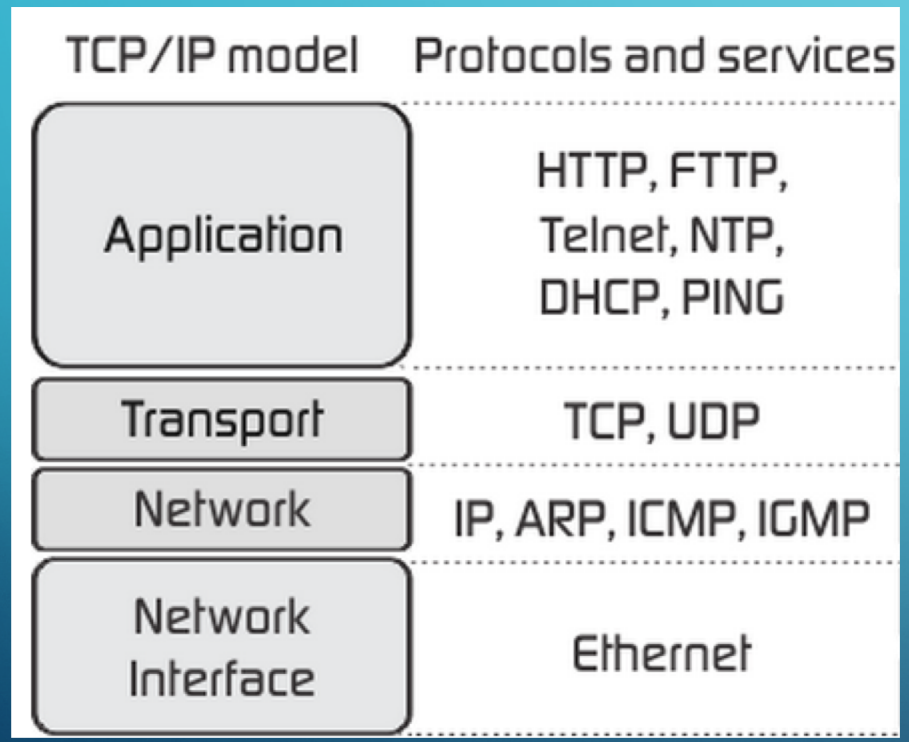

https://superuser.com/questions/1076255/what-layer-of-the-tcp-ip-do-mac-addresses-and-ip-addresses-belong-to

Also:

- custom protocols
- additional Network/Transport data (tunneling)

PROTOCOL RE – WHY?

Wireshark doesn't always know the answer…

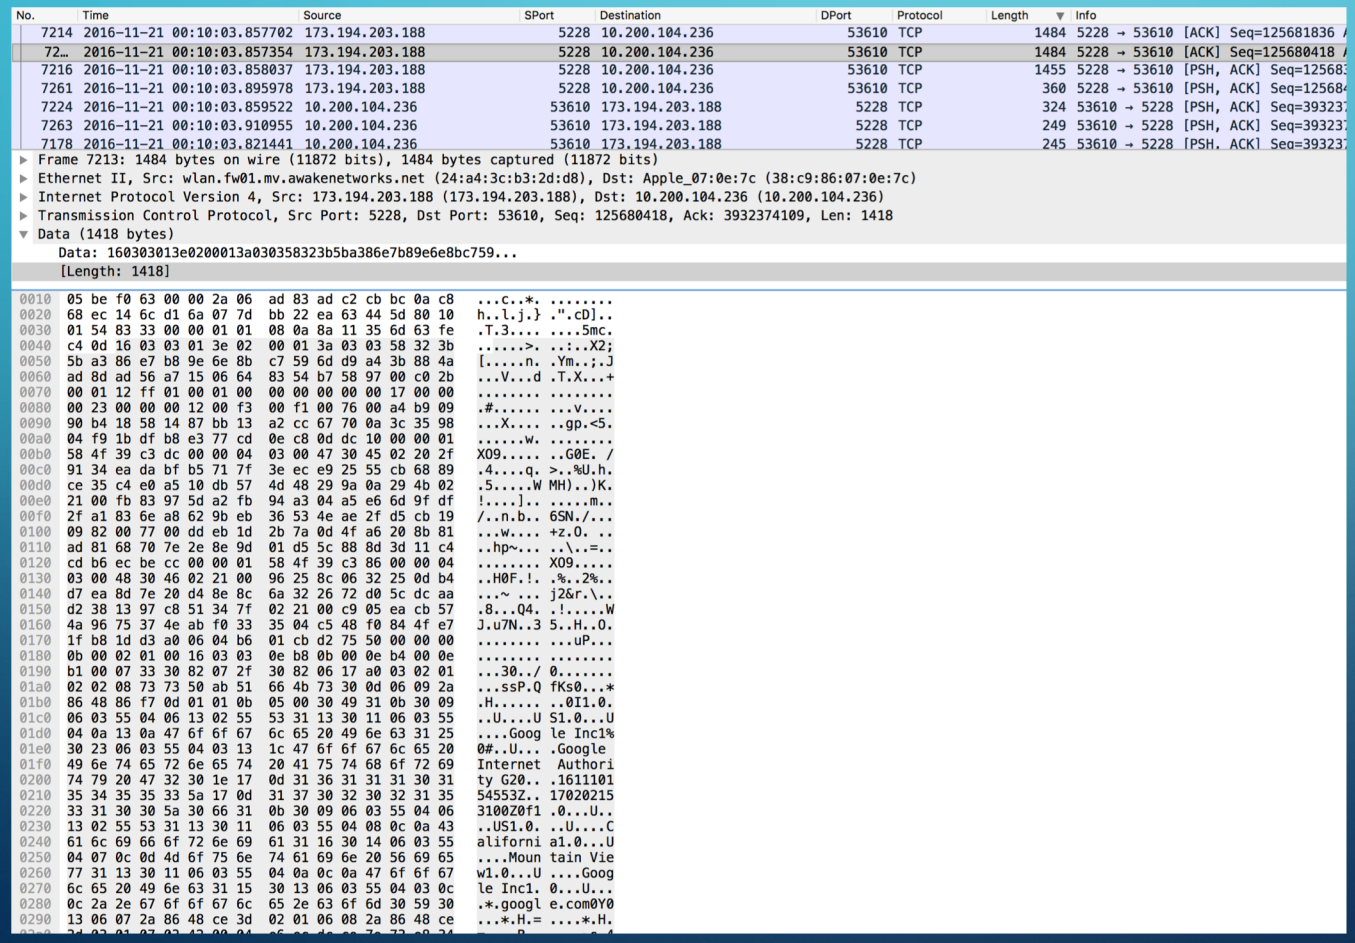




Image: https://www.iconfinder.com/icons/3099320/face_thinking_icon

PROTOCOL RE – WHY?

…and sometimes Wireshark is dead wrong!

```
  962 2016-09-27 22:35:39.699600 10.200.104.136 62363 10.200.104.125 8009 TCP      181 62363 → 8009 [PSH, ACK] Seq=1537761928 Ack=42791
  967 2016-09-27 22:35:39.743935 10.200.104.125  8009 10.200.104.136 62363 TCP      181 8009 → 62363 [PSH, ACK] Seq=4279189658 Ack=15377
  968 2016-09-27 22:35:39.744020 10.200.104.136 62363 10.200.104.125 8009 TCP       66 62363 → 8009 [ACK] Seq=1537762043 Ack=427918977
10… 2016-09-27 22:35:44.285746 10.200.104.136 62392 10.200.104.135 8009 AJP13    181 AJP13 Error? [TCP segment of a reassembled PDU]
1036 2016-09-27 22:35:44.285746 10.200.104.136 62359 10.200.104.123 8009 AJP13    181 AJP13 Error? [TCP segment of a reassembled PDU]
1038 2016-09-27 22:35:44.351094 10.200.104.135  8009 10.200.104.136 62392 AJP13    181 AJP13 Error? [TCP segment of a reassembled PDU]
1039 2016-09-27 22:35:44.351159 10.200.104.136 62392 10.200.104.135 8009 TCP       66 62392 → 8009 [ACK] Seq=3539123141 Ack=2932512527
1046 2016-09-27 22:35:44.397247 10.200.104.136 62333 10.200.104.134 8009 AJP13    181 AJP13 Error? [TCP segment of a reassembled PDU]
1064 2016-09-27 22:35:44.941690 10.200.104.136 62363 10.200.104.125 8009 AJP13    181 AJP13 Error? [TCP segment of a reassembled PDU]
```

```
▶ [SEQ/ACK analysis]
  TCP payload (115 bytes)
  [PDU Size: 772]
  TCP segment data (82 bytes)
  TCP segment data (33 bytes)
▶ [7 Reassembled TCP Segments (772 bytes): #2(115), #149(115), #384(115), #582(115), #823(115), #937(115), #1035(82)]
  Apache JServ Protocol v1.3
```

```
0000  54 60 09 06 d1 cc ac bc  32 b3 03 95 08 00 45 00   T`...... 2.....E.
0010  00 a7 7a 54 40 00 40 06  d9 5d 0a c8 68 88 0a c8   ..zT@.@. .]..h...
0020  68 87 f3 b8 1f 49 d2 f2  bb 52 ae ca 96 9c 80 18   h....I.. .R......
0030  10 00 f5 51 00 00 01 01  08 0a 30 31 5b 60 00 48   ...Q.... ..01[`.H
0040  b6 9f 17 03 03 00 6e 00  00 00 00 00 00 00 0a 86   ......n. ........
0050  86 8a 2e 6a ed c9 00 86  74 96 de 37 3c 34 de 3e   ...j.... t..7<4.>
0060  24 c4 8d 03 3a e6 a7 cb  85 28 d8 5b ef 3e 9f fb   $...:... .(.[.>..
0070  30 e1 84 bb eb 2c 96 cf  1b 31 2b 5f 79 df 46 29   0....,.. .1+_y.F)
0080  ac 25 df 5f 19 5e 7a ca  29 7a f7 fe e9 43 61 1c   .%._.^z. )z...Ca.
0090  2e dd 07 7b bb f3 fe 20  40 07 fa 03 a0 81 89 3c   ...{...  @......<
00a0  d6 d9 c2 22 5f 9d fd a7  b8 8e 7d f5 f7 7d cd 6d   ..."_... ..}..}.m
00b0  13 f7 9c 47 7d                                    ...G}
```




https://imgflip.com/i/2d9mof

WHY DOES IT MATTER?

- SOC → what traffic is bypassing you without your knowledge?
- Red Team → what apps can you take advantage of that the SOC doesn't know how to analyze (or even that it exists!)? Can you find sensitive data leaking? Can you inject/replay/spoof data?
- IT Staff → Application inventory
- Developers → Ever get stuck without the source code on a project?
- Management → You're responsible for traffic moving NSEW…better understand it!

TOOLBOX



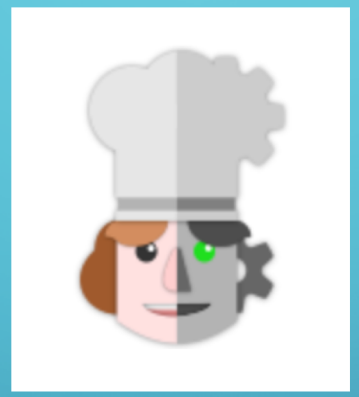



GETTING INTO THE WEEDS



https://reedaboutleadership.wordpress.com/2014/04/23/knowing-when-to-get-into-the-weeds/


- Hands-on for rest of the class!
  - Will start off with level-setting information, but will quickly go much deeper!
    - Please don't skip ahead
  - If a fellow classmate needs help and I haven't gotten to them, please help ☺
- Identifying Structure
- Advanced RE—Teasing out Detailed Structure


SAMPLES


- https://dl.awakesecurity.com/defcon/nw_re_tools/resources.html
  - Download all, open the PCAPNG file in Wireshark
  - Don't yet explore the Lua files – that fun is for later!


ISOLATION


- Using the PCAP, work through how to use display filters to isolate relevant behavior
  - TCP/UDP field selection
  - "Contains"
  - Copying payload bytes

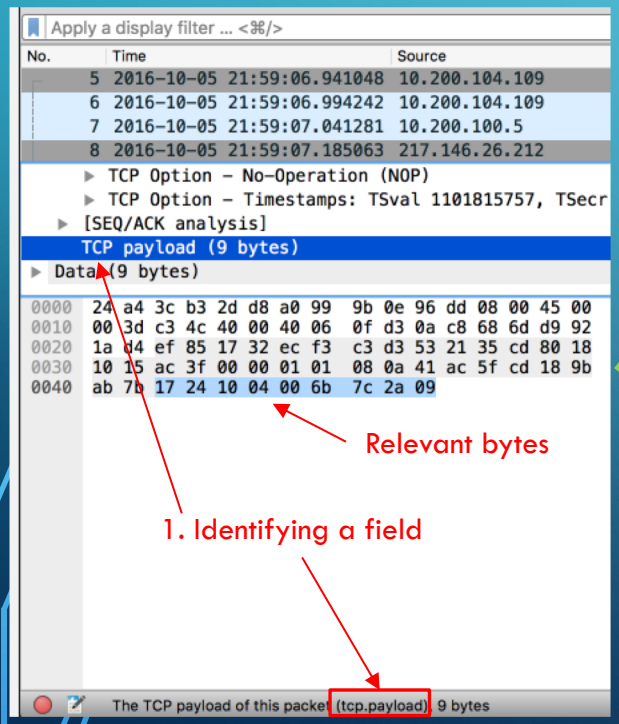

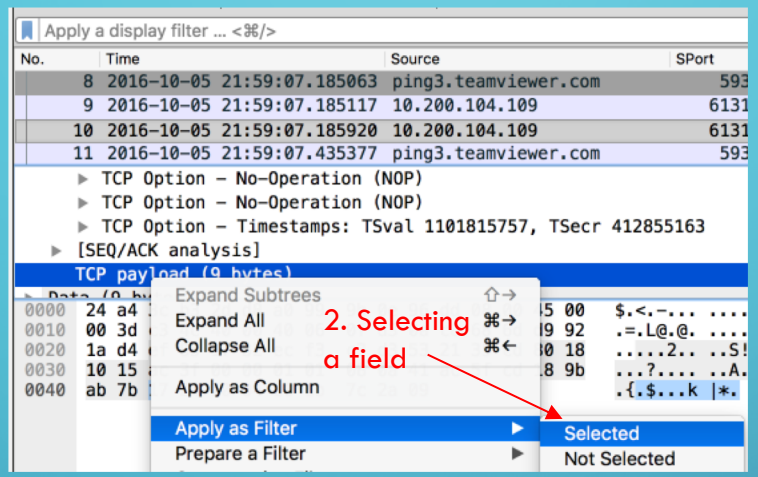

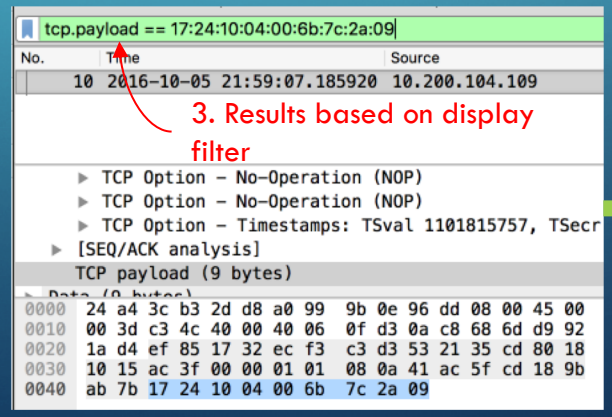


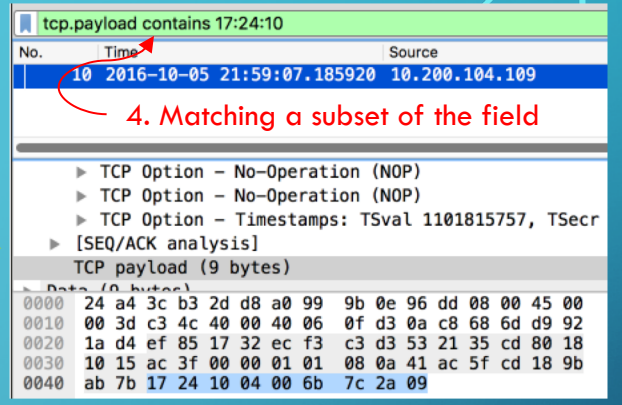

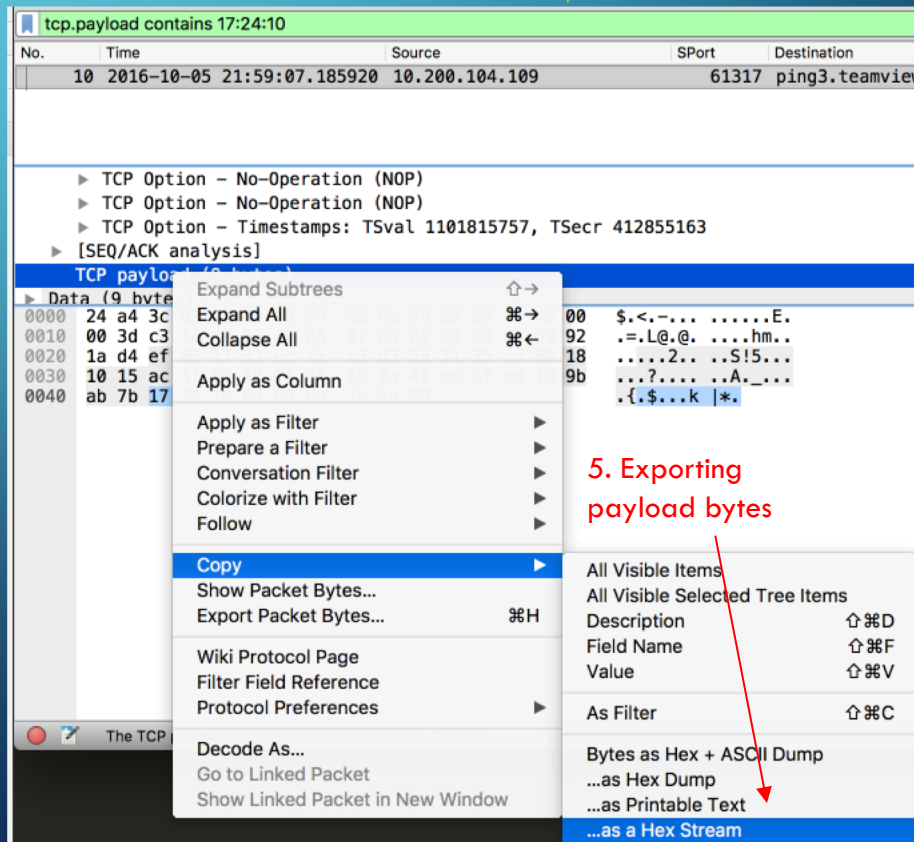


REASONING ABOUT THE DATA -- FORMATS

- Plaintext vs. Encoded vs. Encrypted
  - General Terms
    - Input: what we start with
    - Output: what we end with
    - Operation: what we apply to the input to get the output

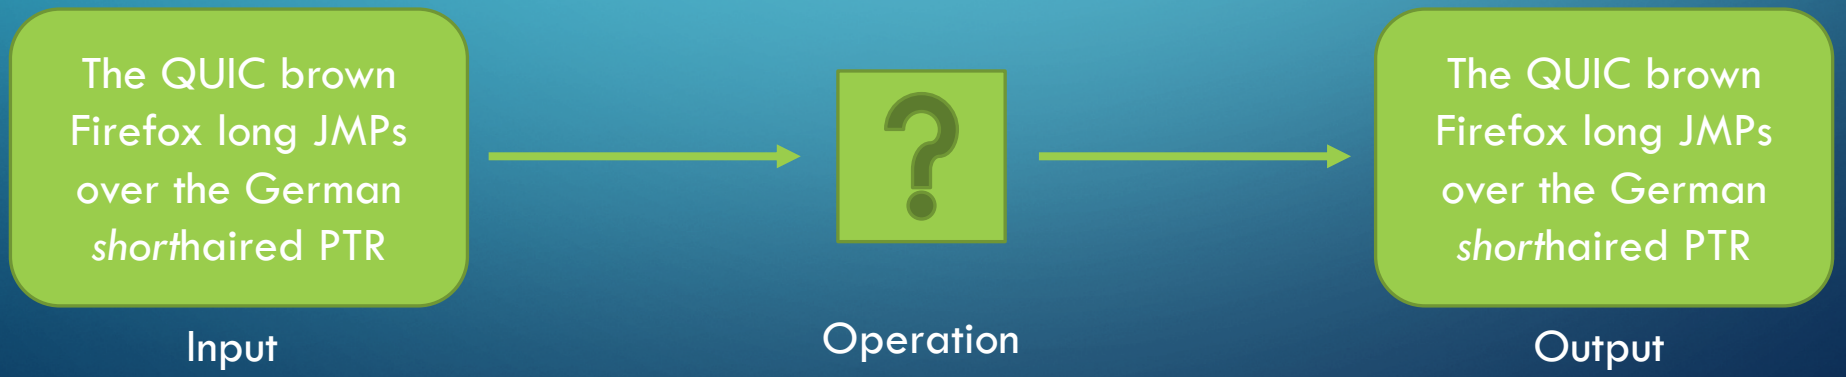

REASONING ABOUT THE DATA -- FORMATS

- Plaintext vs. Encoded vs. Encrypted
  - **Plain**text → Readable
    - no operation applied to the input

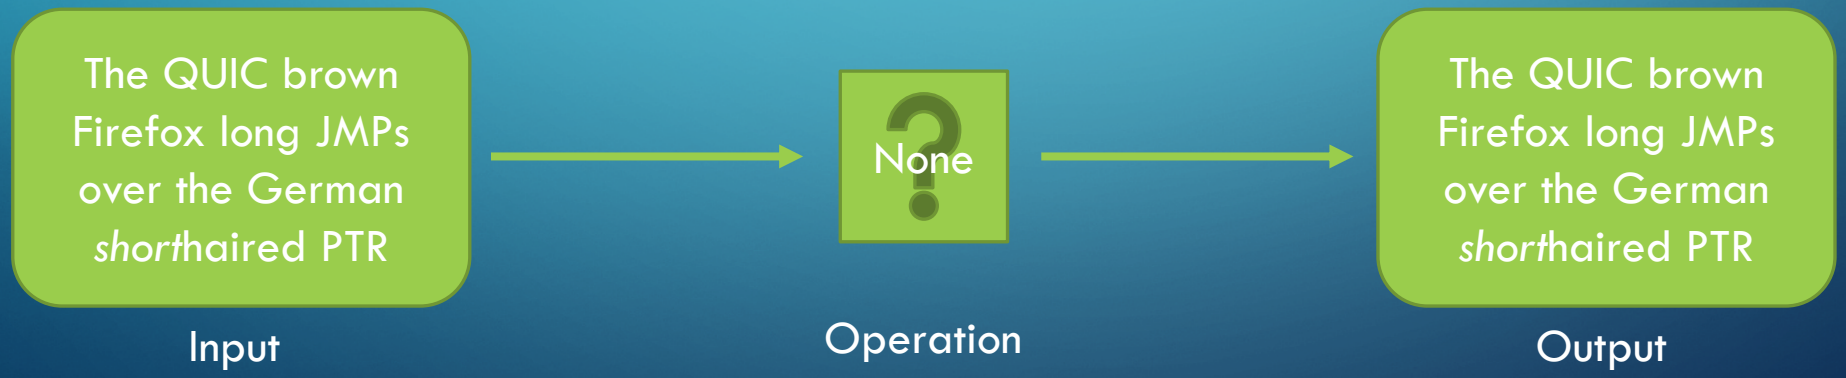

REASONING ABOUT THE DATA -- FORMATS

- Plaintext vs. Encoded vs. Encrypted
  - Encoded → Input modified using **some operation** to create a (generally) less readable output
    - Only need knowledge of the algorithm used for the operation to get back to the input from the output
    - Not actually meant for secrecy[1], but often times used in such a way



[1] https://danielmiessler.com/study/encoding-encryption-hashing-obfuscation/

REASONING ABOUT THE DATA -- FORMATS



The QUIC brown Firefox long JMPs over the German *short*haired PTR

Input

Base64

Operation

VGhlIFFVSUMgYnJvd24gRmlyZWZveCBsb25nIEpNUHMgb3ZlciB0aGUgR2VybWFulHNob3J0aGFpcmVkIFBUUg==

Output

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

BaseX describes how many "digits" are used to represent a value

Binary ➔ Base2 … **2** digits (0_2 through 1_2)

Decimal ➔ Base10 … **10** digits (0_{10} through 9_{10})

Hex ➔ Base16 … **16** digits (0_{16} through 9_{16} and A_{16} through F_{16})

Base64 … **64** digits (standard is A_{64} through Z_{64}, a_{64} through z_{64}, 0_{64} through 9_{64}, $+_{64}$ and $/_{64}$ [with = as a padding value])

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR

Input

Base64

Operation

VGhlIFFVSUMgYnJvd24gRmlyZWZveCBsb25nIEpNUHMgb3ZlciB0aGUgR2VybWFuIHNob3J0aGFpcmVkIFBUUg==

Output



Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com


Character: T h e

REASONING ABOUT THE DATA -- FORMATS



The QUIC brown Firefox long JMPs over the German *short*haired PTR

Input

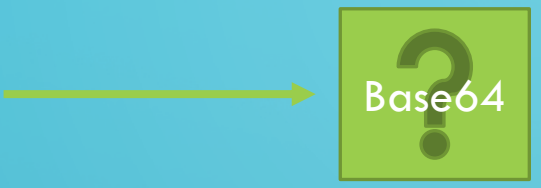

Operation

VGhlIFFVSUMgYnJvd24gRmlyZWZveCBsb25nIEpNUHMgb3ZlciB0aGUgR2VybWFuIHNob3J0aGFpcmVkIFBUUg==

Output



Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character:	T	h	e
Hex Value:	0x54	0x68	0x65

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR

Input

Base64

Operation

VGhlIFFVSUMgYnJvd24gRmlyZWZveCBsb25nIEpNUHMgb3ZlciB0aGUgR2VybWFuIHNob3J0aGFpcmVkIFBUUg==

Output



Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character:	T	h	e
Hex Value:	0x54	0x68	0x65
Binary Value:	0101 0100	0110 1000	0110 0101

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR

Input


Base64

Operation

VGhlIFFVSUMgYnJvd24gRmlyZWZveCBsb25nIEpNUHMgb3ZlciB0aGUgR2VybWFuIHNob3J0aGFpcmVkIFBUUg==

Output



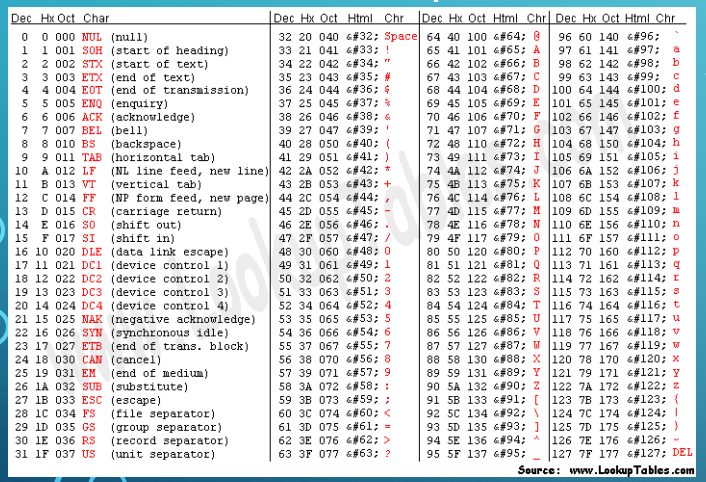

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character:	T	h	e
Hex Value:	0x54	0x68	0x65
Binary Value:	0101 0100	0110 1000	0110 0101
To Base64:	010101	000110 100001	100101

REASONING ABOUT THE DATA -- FORMATS



The QUIC brown Firefox long JMPs over the German *short*haired PTR

→ Base64 →

VGhlIFFVSUMgYnJvd24gRmlyZWZveCBsb25nIEpNUHMgb3ZlciB0aGUgR2VybWFulHNob3J0aGFpcmVkIFBUUg==

Input

Operation

Output

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character:	T	h	e
Hex Value:	0x54	0x68	0x65
Binary Value:	0101 0100	0110 1000	0110 0101
To Base64:	010101	000110 100001	100101
To Hex:	0x15	0x06 0x21	0x25

REASONING ABOUT THE DATA -- FORMATS

Come again?

The QUIC brown Firefox long JMPs over the German *short*haired PTR

Input

Base64

Operation

VGhlIFFVSUMgYnJvd24gRmlyZWZveCBsb25nIEpNUHMgb3ZlciB0aGUgR2VybWFulHNob3J0aGFpcmVkIFBUUg==

Output



Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Table 1: The Base 64 Alphabet


Value	Encoding	Value	Encoding	Value	Encoding	Value	Encoding
0	A	17	R	34	i	51	z
1	B	18	S	35	j	52	0
2	C	19	T	36	k	53	1
3	D	20	U	37	l	54	2
4	E	21	V	38	m	55	3
5	F	22	W	39	n	56	4
6	G	23	X	40	o	57	5
7	H	24	Y	41	p	58	6
8	I	25	Z	42	q	59	7
9	J	26	a	43	r	60	8
10	K	27	b	44	s	61	9
11	L	28	c	45	t	62	+
12	M	29	d	46	u	63	/
13	N	30	e	47	v		
14	O	31	f	48	w	(pad)	=
15	P	32	g	49	x		

Character:	T	h	e
Hex Value:	0x54	0x68	0x65
Binary Value:	0101 0100	0110 1000	0110 0101
To Base64:	010101	000110	100001	100101
To Hex:	0x15	0x06	0x21	0x25
To Base64 alphabet:	V	G	h	l

Source: https://blogs.oracle.com/rammenon/base64-explained

REASONING ABOUT THE DATA -- FORMATS

- Plaintext vs. Encoded vs. Encrypted
  - Encrypted → Input modified via an operation* to create a "scrambled" output
    - *operation includes **at least** the algorithm and a (secretly-held) key
    - To go from output to input, the **secret key and the algorithm** (in the simple case) must be known

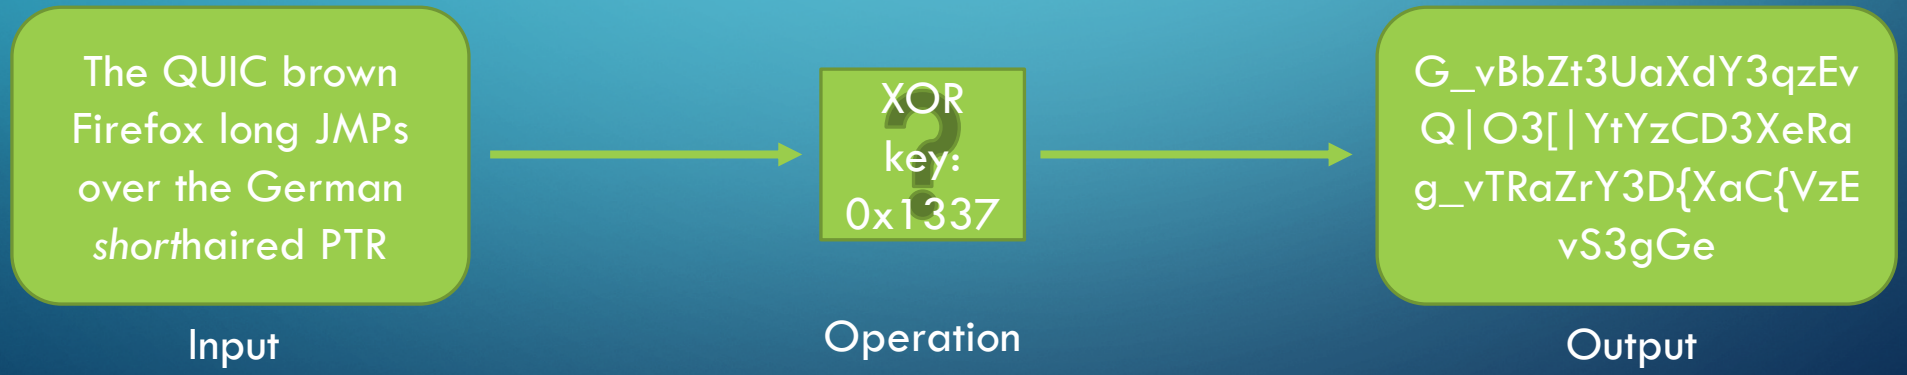

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR


Input

XOR key: 0x1337

Operation

G_vBbZt3UaXdY3qzEvQ|O3[|YtYzCD3XeRag_vTRaZrY3D{XaC{VzEvS3gGe

Output

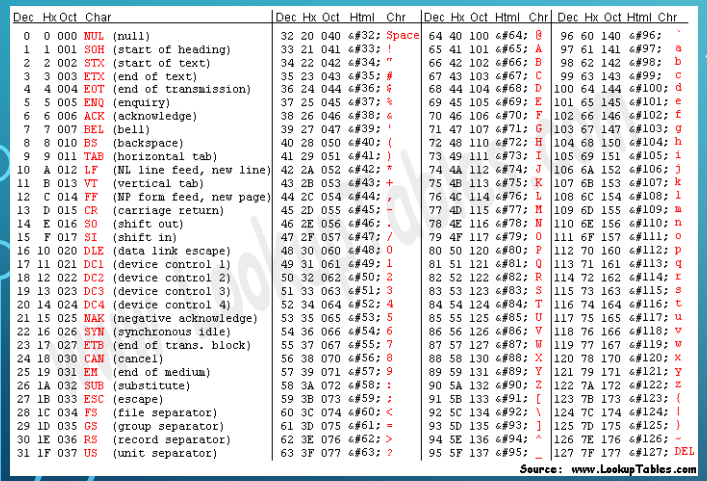

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character: T h e

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR


Input

XOR key: 0x1337

Operation

G_vBbZt3UaXdY3qzEv Q|O3[|YtYzCD3XeRa g_vTRaZrY3D{XaC{VzE vS3gGe

Output

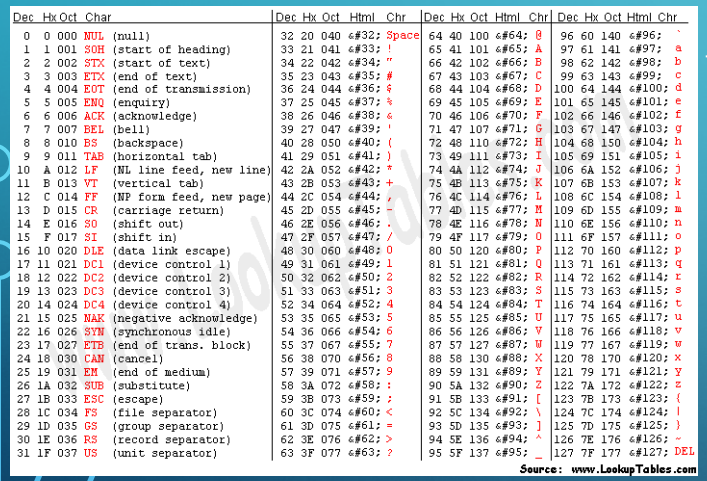

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character:	T	h	e
Hex Value:	0x54	0x68	0x65

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR


Input

XOR key: 0x1337

Operation

G_vBbZt3UaXdY3qzEv
Q|O3[|YtYzCD3XeRa
g_vTRaZrY3D{XaC{VzE
vS3gGe

Output

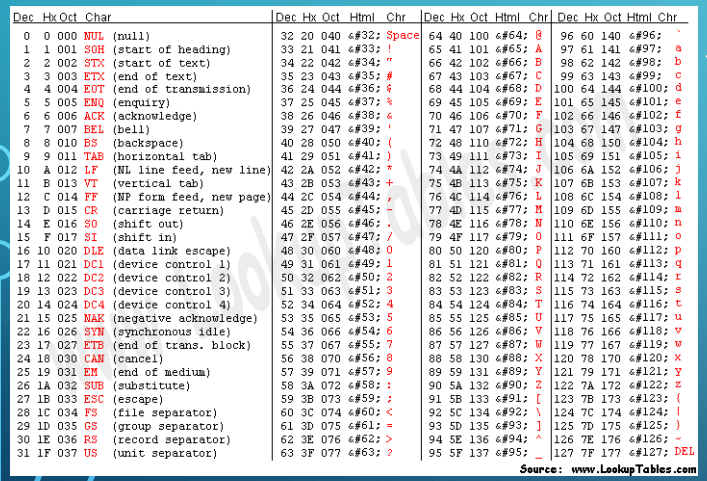

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character: T h e

Hex Value: 0x54 0x68 0x65

Binary Value: 0101 0100 0110 1000 0110 0101

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR


Input

XOR key: 0x1337

Operation

G_vBbZt3UaXdY3qzEv
Q|O3[|YtYzCD3XeRa
g_vTRaZrY3D{XaC{VzE
vS3gGe

Output

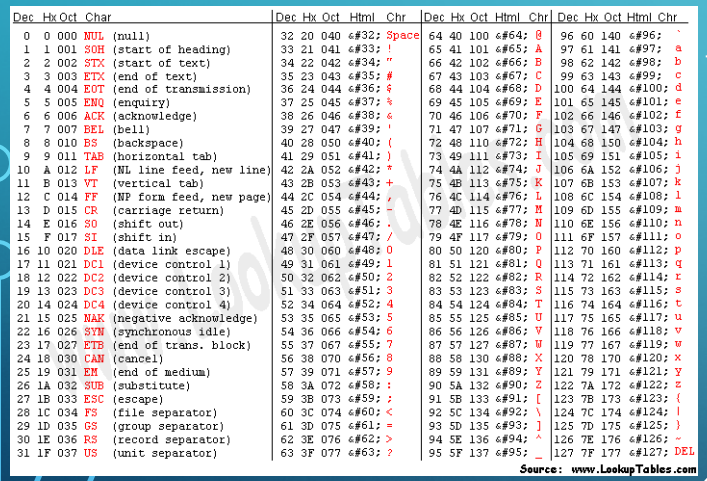

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character:	T	h	e
Hex Value:	0x54	0x68	0x65
Binary Value:	0101 0100	0110 1000	0110 0101
Key:	0001 0011	0011 0111	0001 0011

Key 0x1337 repeated across data

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR


Input

XOR key: 0x1337

Operation

G_vBbZt3UaXdY3qzEv
Q|O3[|YtYzCD3XeRa
g_vTRaZrY3D{XaC{VzE
vS3gGe

Output

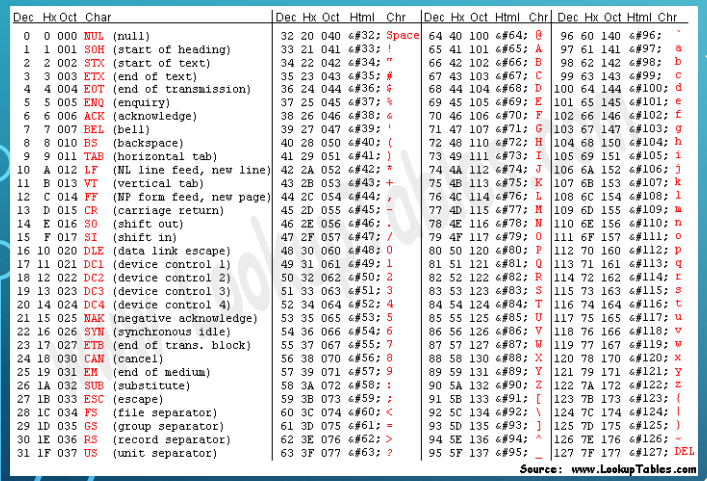

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character:	T	h	e
Hex Value:	0x54	0x68	0x65
Binary Value:	0101 0100	0110 1000	0110 0101
Key:	0001 0011	0011 0111	0001 0011
Result of XOR:	0100 0111	0101 1111	0111 0110

Key 0x1337 repeated across data

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR


Input

XOR key: 0x1337

Operation

G_vBbZt3UaXdY3qzEv
Q|O3[|YtYzCD3XeRa
g_vTRaZrY3D{XaC{VzE
vS3gGe

Output

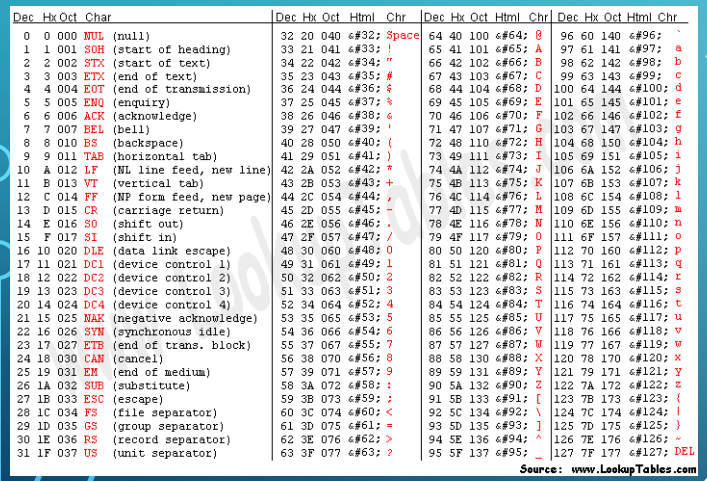

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL

Source: www.LookupTables.com

Character:	T	h	e
Hex Value:	0x54	0x68	0x65
Binary Value:	0101 0100	0110 1000	0110 0101
Key:	0001 0011	0011 0111	0001 0011
Result of XOR:	0100 0111	0101 1111	0111 0110
To Hex:	0x47	0x5F	0x76

Key 0x1337 repeated across data

REASONING ABOUT THE DATA -- FORMATS

The QUIC brown Firefox long JMPs over the German *short*haired PTR


Input

XOR key: 0x1337

Operation

G_vBbZt3UaXdY3qzEv Q|O3[|YtYzCD3XeRa g_vTRaZrY3D{XaC{VzE vS3gGe

Output

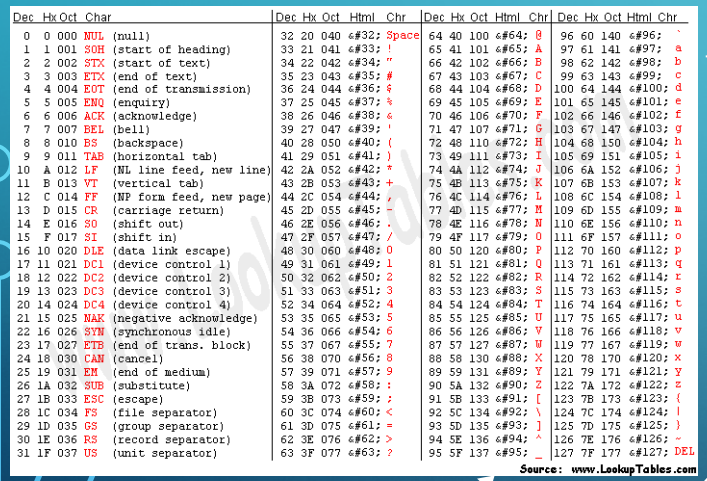

Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL


Source: www.LookupTables.com

	T	h	e
Hex Value:	0x54	0x68	0x65
Binary Value:	0101 0100	0110 1000	0110 0101
Key:	0001 0011	0011 0111	0001 0011
Result of XOR:	0100 0111	0101 1111	0111 0110
To Hex:	0x47	0x5F	0x76
To Character:	G	_	v

Key 0x1337 repeated across data

REASONING ABOUT THE DATA -- FORMATS

- Plaintext vs. Encoded vs. Encrypted
  - Interactive Examples
    - Enable/Disable different recipe steps
    - Play around with the input text!

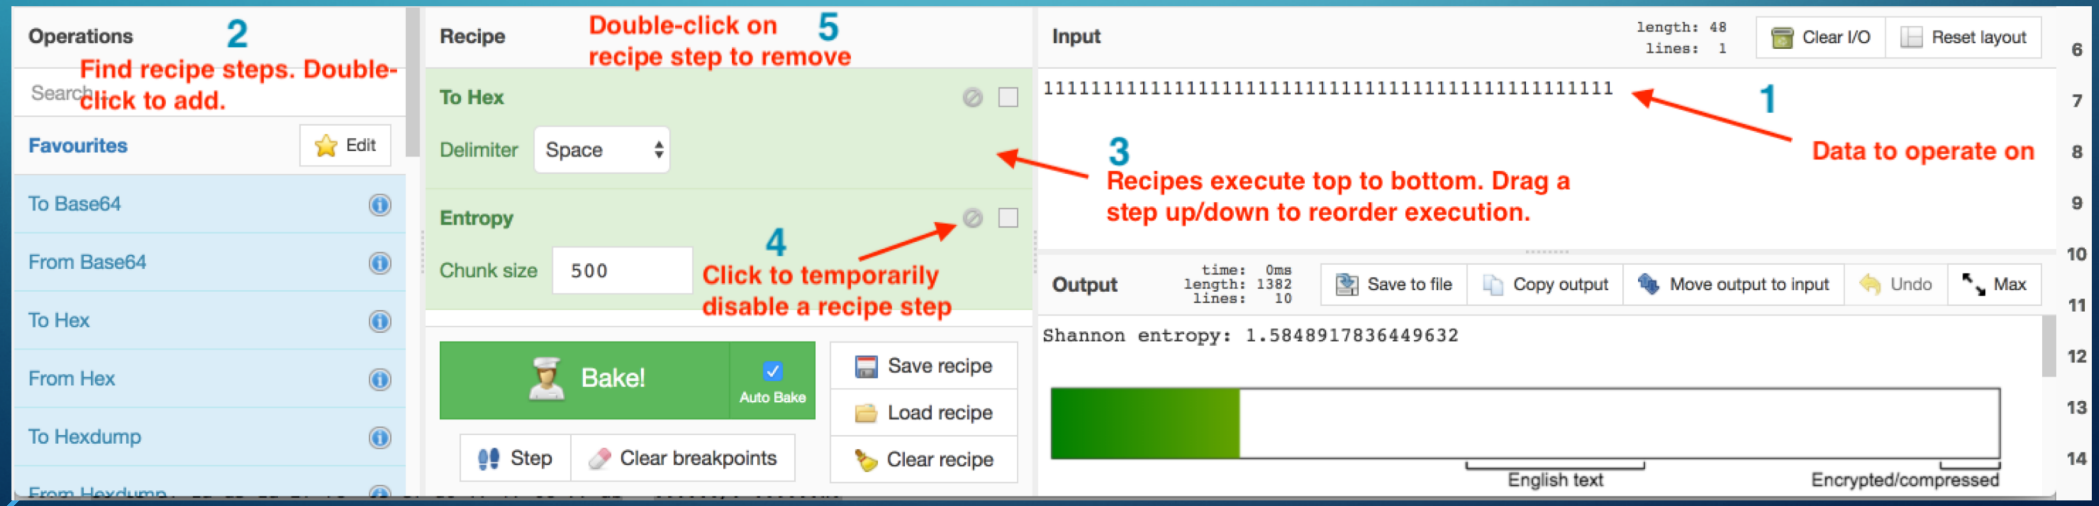


REASONING ABOUT THE DATA -- ENTROPY

- Entropy
  - How close to random the data is
    - Score ranges from 0 to 8 (computing)
    - Samples: score of 0, simple pattern, banging on a keyboard "randomly"
    - How high of a score can you hand-produce?

REASONING ABOUT THE DATA -- ENTROPY


- Entropy
  - Why do we care?
    - Helps to identify patterns and structure

      (or lack thereof)
    - Interactive Examples
      - Enable different encoding/encryption levels
      - Do the entropy values make sense to you?
        - Why is Base64 only slightly above English text range?
        - Why does ROT13 not change entropy value?
        - Would you rather encrypt with XOR or AES?

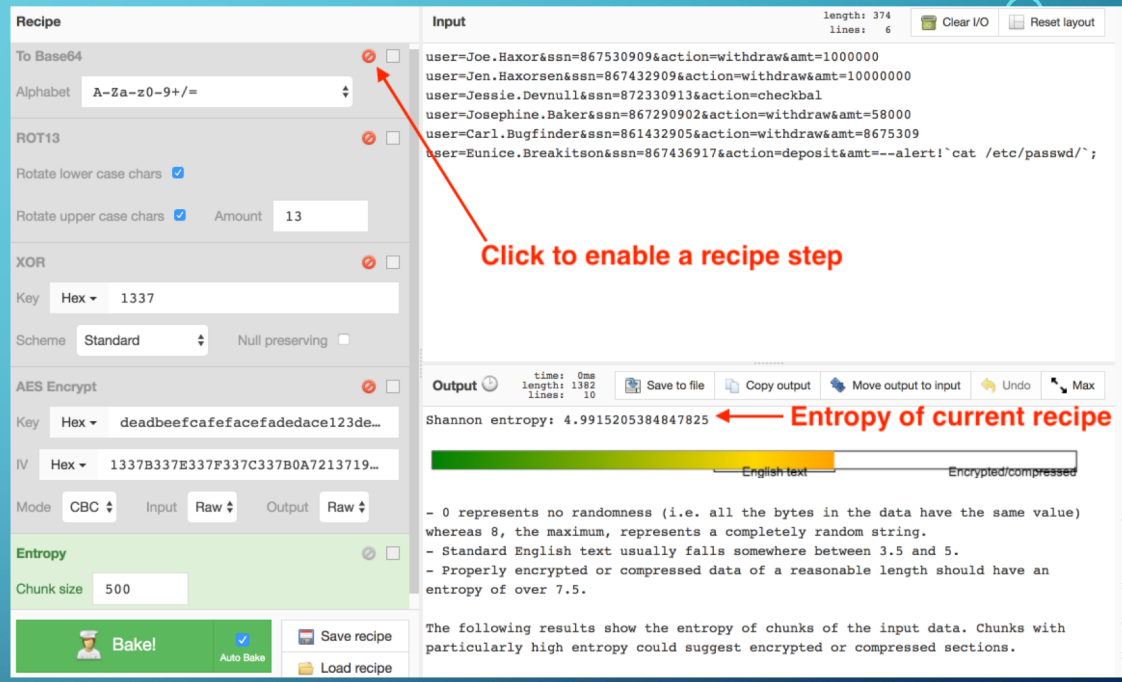


REASONING ABOUT THE DATA – FORMATS

- Using the PCAP, work through trying to identify whether certain aspects of the communication are encrypted, encoded, or plaintext
  - Packets to focus on:
    - Packet 27
    - Packet 55
    - Packet 118

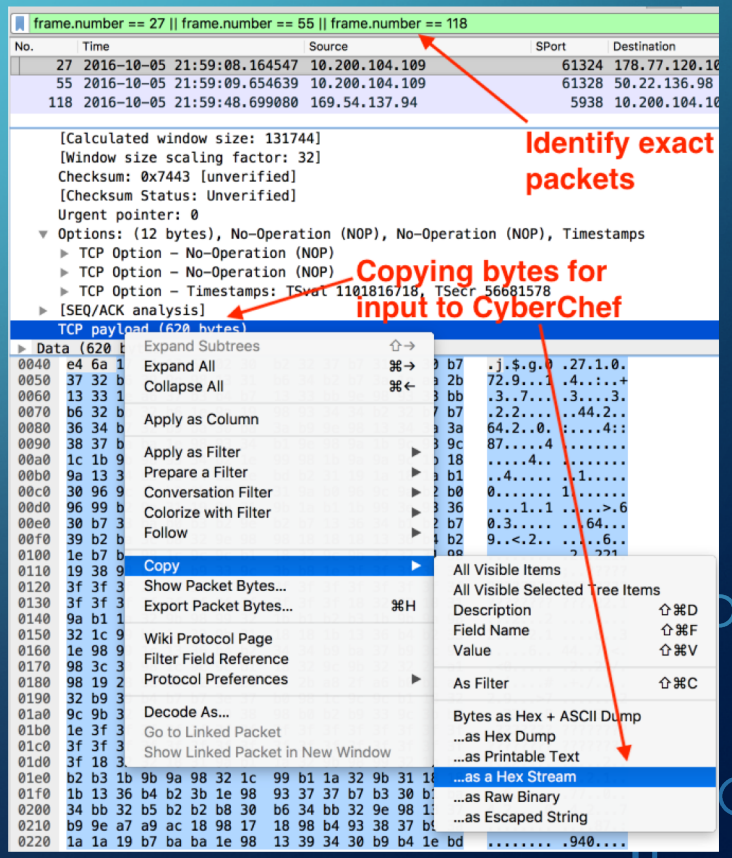


REASONING ABOUT THE DATA – FORMATS

- How can we identify common encoding/weak encryption schemes?

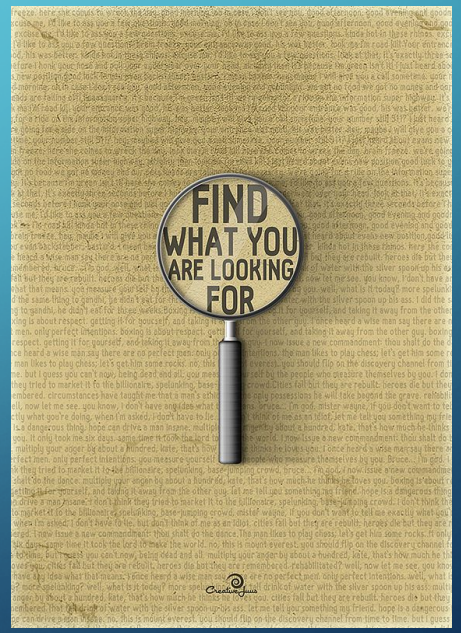



creativejuus.com

REASONING ABOUT THE DATA – FORMATS

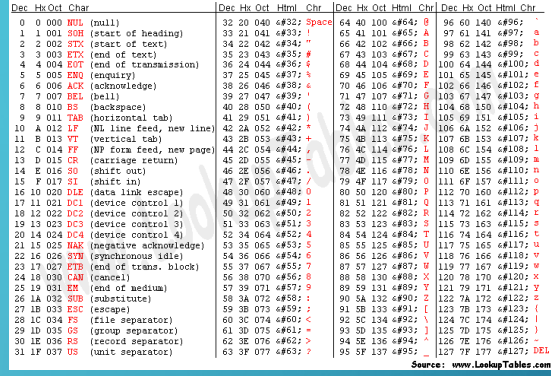


Plaintext

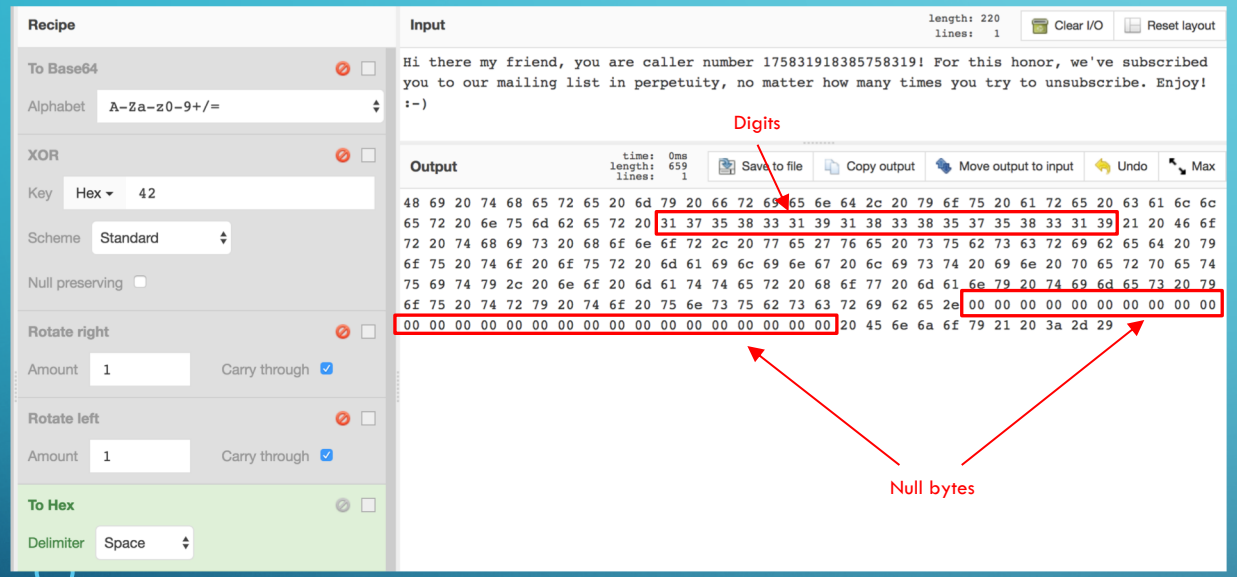

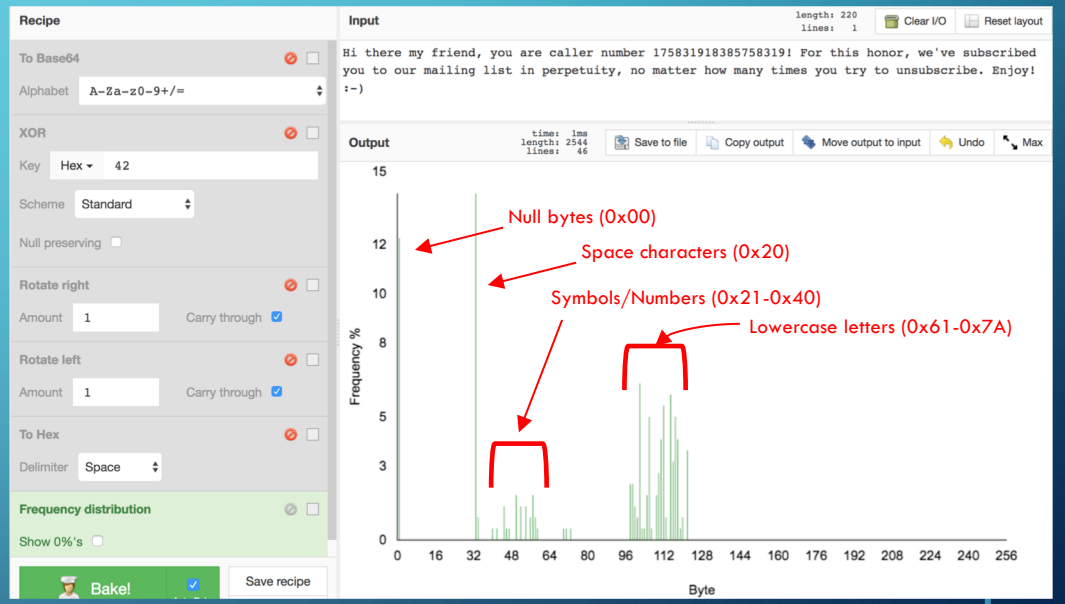



REASONING ABOUT THE DATA – FORMATS

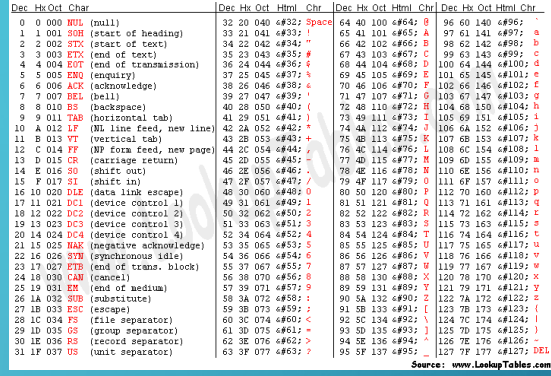

Base64



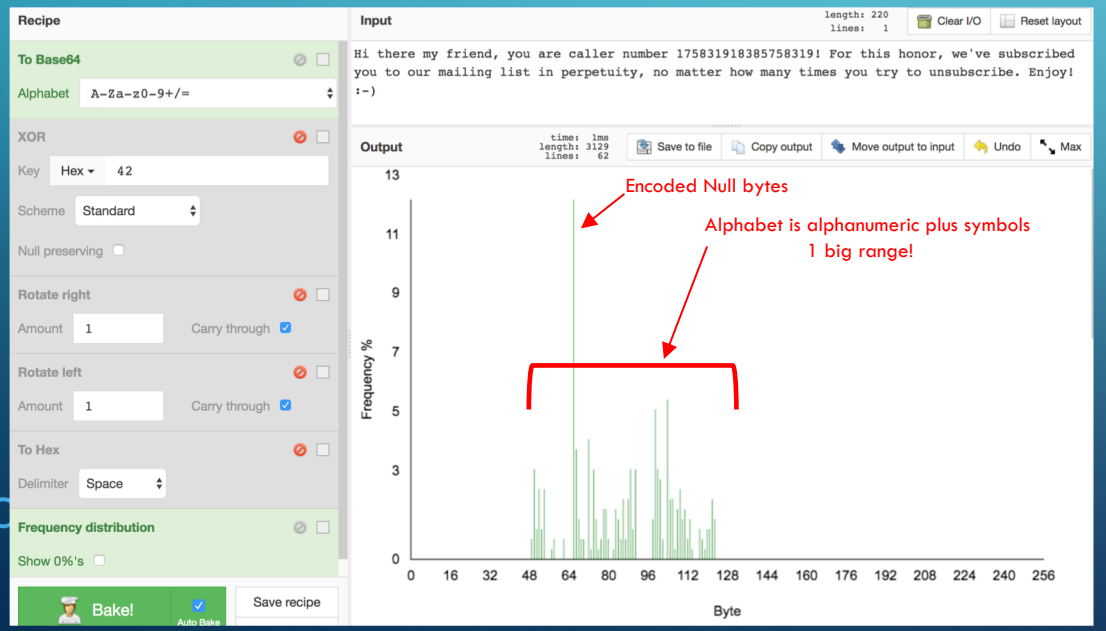

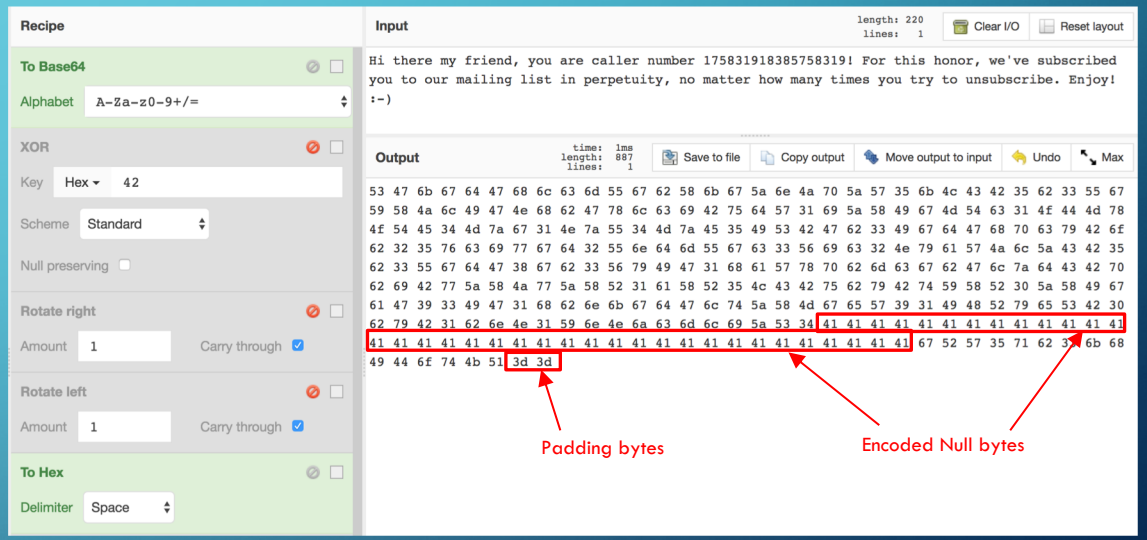

REASONING ABOUT THE DATA – FORMATS

Rotate left 1 bit w/ carry (RLC1)

- Approximately a multiplication by 2


Examples:


$0000\ 0001_2$ when rotated left 1 bit becomes $0000\ 0010_2$ (1_{10} becomes 2_{10})

$0000\ 0011\ 1000\ 0000_2$ when rotated left 1 bit (w/ carry) becomes $0000\ 0111\ 0000\ 0000_2$ (896_{10} becomes 1792_{10})

REASONING ABOUT THE DATA – FORMATS

Rotate left 1 bit w/ carry (RLC1)

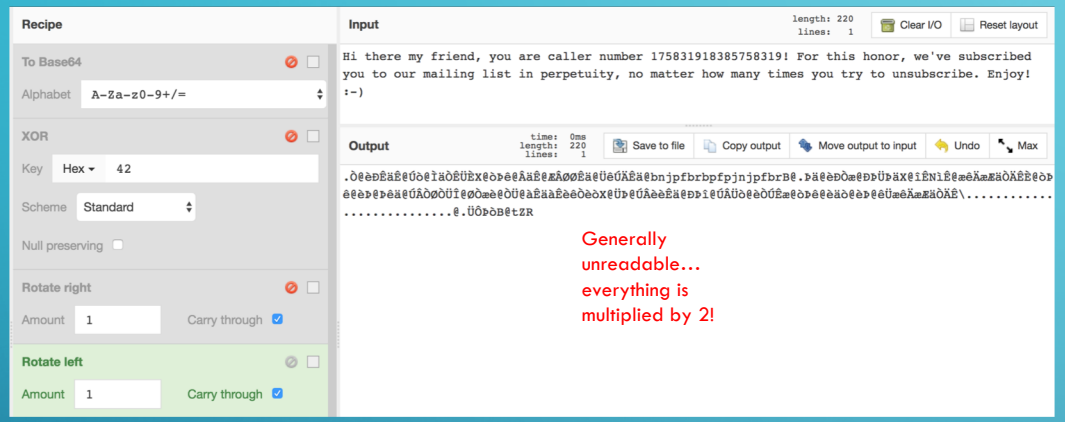


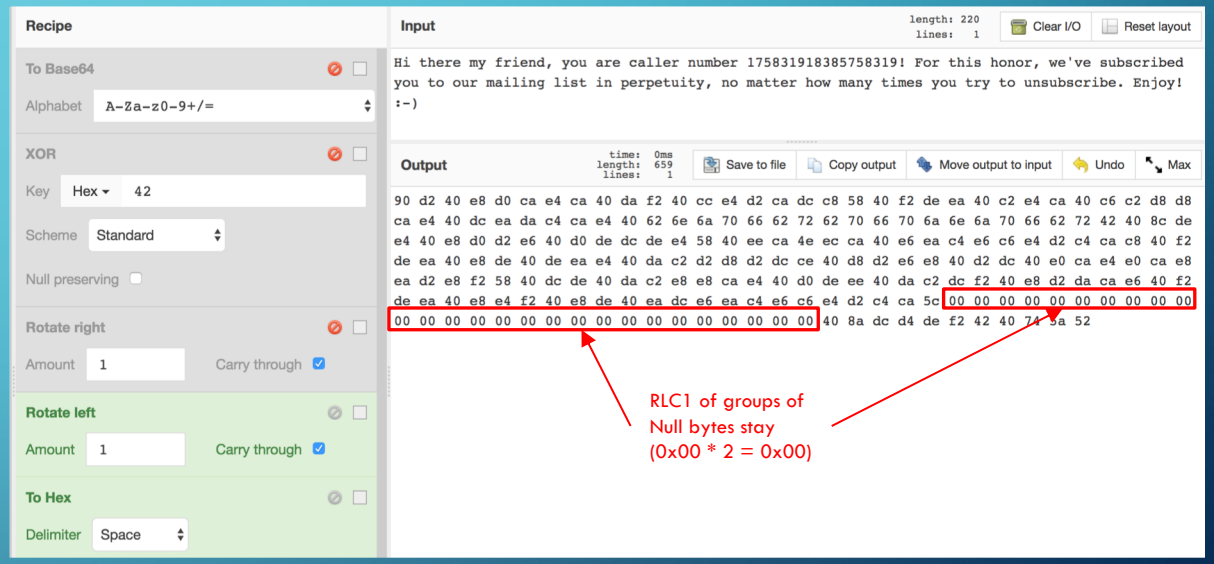




REASONING ABOUT THE DATA – FORMATS

Rotate left 1 bit w/ carry (RLC1)

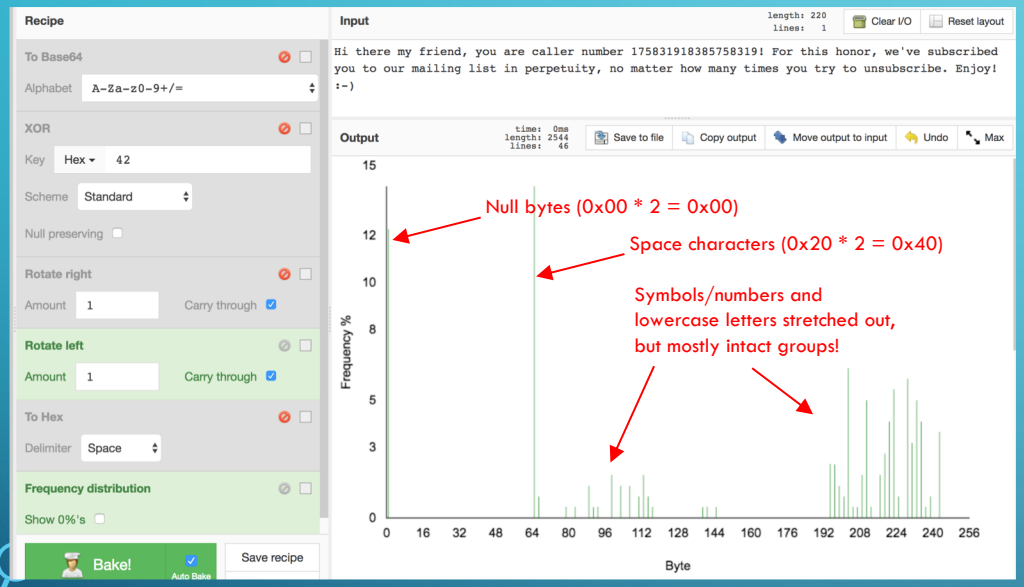

Plaintext

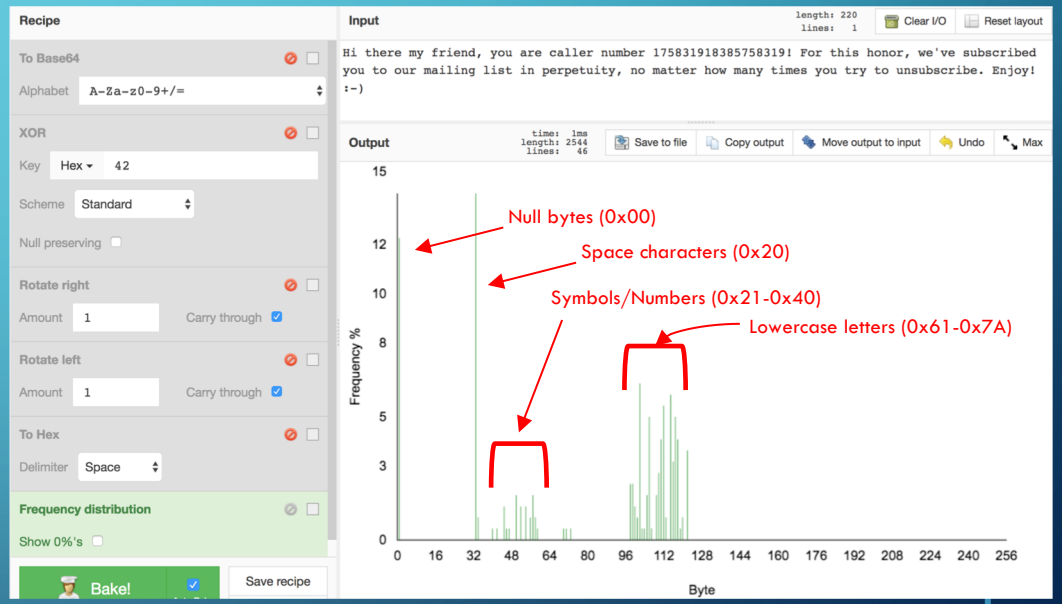

REASONING ABOUT THE DATA – FORMATS

Rotate right 1 bit w/ carry (RRC1)

- Approximately a division by 2


Examples:


$0000\ 0001_2$ when rotated right 1 bit becomes $0000\ 0000_2$ (1_{10} becomes 0_{10})


$0000\ 0011\ 1000\ 0000_2$ when rotated right 1 bit (w/ carry) becomes $0000\ 0001\ 1100\ 0000_2$ (896_{10} becomes 448_{10})


REASONING ABOUT THE DATA – FORMATS

Rotate right 1 bit w/ carry (RRC1)

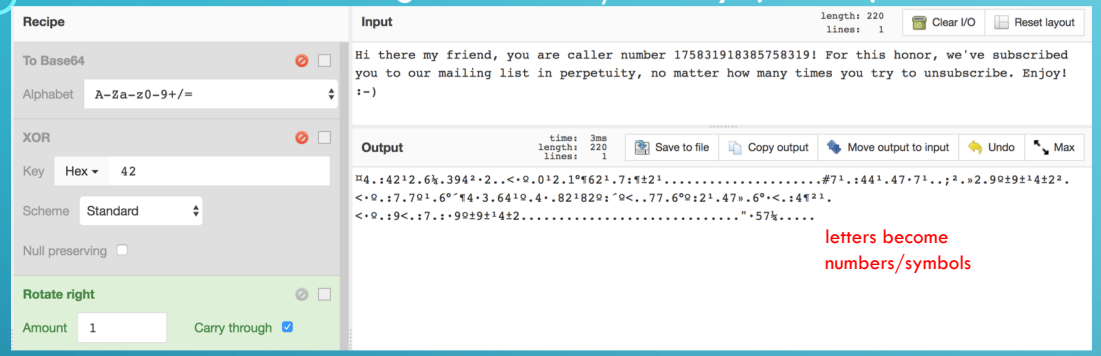

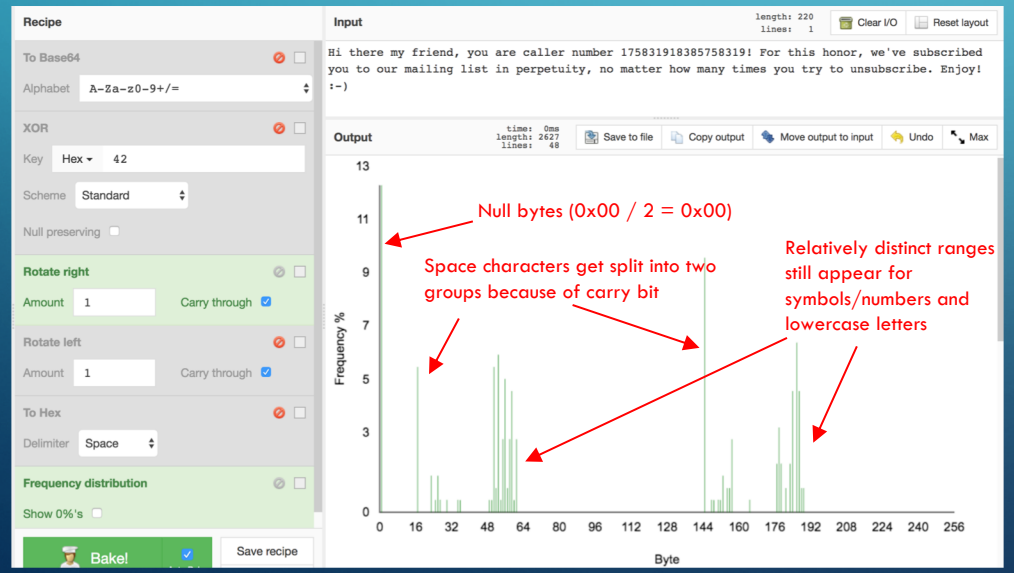

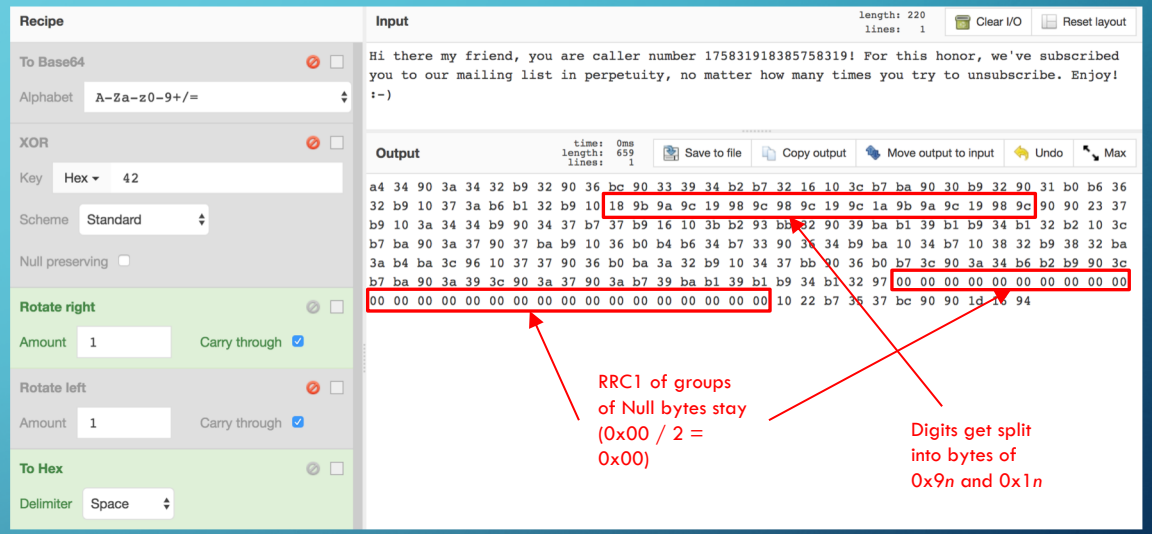


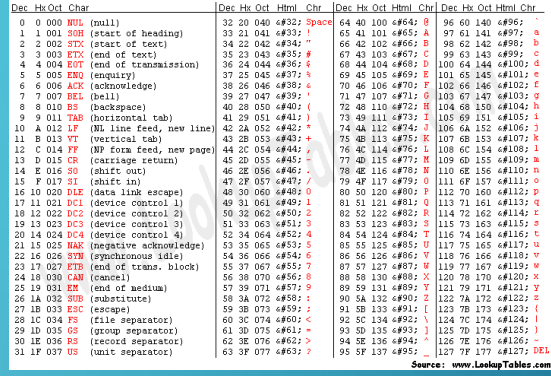


Dec	Hx	Oct	Char	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr	Dec	Hx	Oct	Html	Chr
0	0	000	NUL (null)	32	20	040		Space	64	40	100	@	@	96	60	140	`	`
1	1	001	SOH (start of heading)	33	21	041	!	!	65	41	101	A	A	97	61	141	a	a
2	2	002	STX (start of text)	34	22	042	"	"	66	42	102	B	B	98	62	142	b	b
3	3	003	ETX (end of text)	35	23	043	#	#	67	43	103	C	C	99	63	143	c	c
4	4	004	EOT (end of transmission)	36	24	044	$	$	68	44	104	D	D	100	64	144	d	d
5	5	005	ENQ (enquiry)	37	25	045	%	%	69	45	105	E	E	101	65	145	e	e
6	6	006	ACK (acknowledge)	38	26	046	&	&	70	46	106	F	F	102	66	146	f	f
7	7	007	BEL (bell)	39	27	047	'	'	71	47	107	G	G	103	67	147	g	g
8	8	010	BS (backspace)	40	28	050	(	(	72	48	110	H	H	104	68	150	h	h
9	9	011	TAB (horizontal tab)	41	29	051	)	)	73	49	111	I	I	105	69	151	i	i
10	A	012	LF (NL line feed, new line)	42	2A	052	*	*	74	4A	112	J	J	106	6A	152	j	j
11	B	013	VT (vertical tab)	43	2B	053	+	+	75	4B	113	K	K	107	6B	153	k	k
12	C	014	FF (NP form feed, new page)	44	2C	054	,	,	76	4C	114	L	L	108	6C	154	l	l
13	D	015	CR (carriage return)	45	2D	055	-	-	77	4D	115	M	M	109	6D	155	m	m
14	E	016	SO (shift out)	46	2E	056	.	.	78	4E	116	N	N	110	6E	156	n	n
15	F	017	SI (shift in)	47	2F	057	/	/	79	4F	117	O	O	111	6F	157	o	o
16	10	020	DLE (data link escape)	48	30	060	0	0	80	50	120	P	P	112	70	160	p	p
17	11	021	DC1 (device control 1)	49	31	061	1	1	81	51	121	Q	Q	113	71	161	q	q
18	12	022	DC2 (device control 2)	50	32	062	2	2	82	52	122	R	R	114	72	162	r	r
19	13	023	DC3 (device control 3)	51	33	063	3	3	83	53	123	S	S	115	73	163	s	s
20	14	024	DC4 (device control 4)	52	34	064	4	4	84	54	124	T	T	116	74	164	t	t
21	15	025	NAK (negative acknowledge)	53	35	065	5	5	85	55	125	U	U	117	75	165	u	u
22	16	026	SYN (synchronous idle)	54	36	066	6	6	86	56	126	V	V	118	76	166	v	v
23	17	027	ETB (end of trans. block)	55	37	067	7	7	87	57	127	W	W	119	77	167	w	w
24	18	030	CAN (cancel)	56	38	070	8	8	88	58	130	X	X	120	78	170	x	x
25	19	031	EM (end of medium)	57	39	071	9	9	89	59	131	Y	Y	121	79	171	y	y
26	1A	032	SUB (substitute)	58	3A	072	:	:	90	5A	132	Z	Z	122	7A	172	z	z
27	1B	033	ESC (escape)	59	3B	073	;	;	91	5B	133	[	[	123	7B	173	{	{
28	1C	034	FS (file separator)	60	3C	074	<	<	92	5C	134	\	\	124	7C	174			|
29	1D	035	GS (group separator)	61	3D	075	=	=	93	5D	135	]	]	125	7D	175	}	}
30	1E	036	RS (record separator)	62	3E	076	>	>	94	5E	136	^	^	126	7E	176	~	~
31	1F	037	US (unit separator)	63	3F	077	?	?	95	5F	137	_	_	127	7F	177	&#127;	DEL


Source: www.LookupTables.com


REASONING ABOUT THE DATA – FORMATS

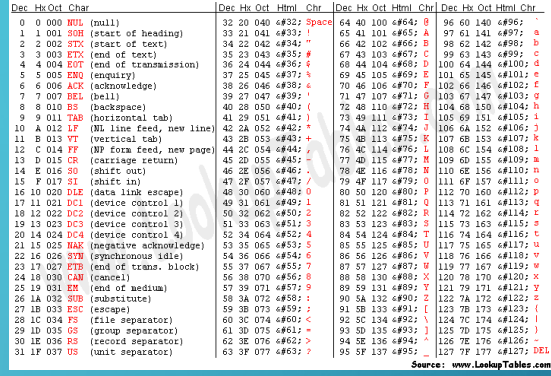

XOR 1 byte encryption

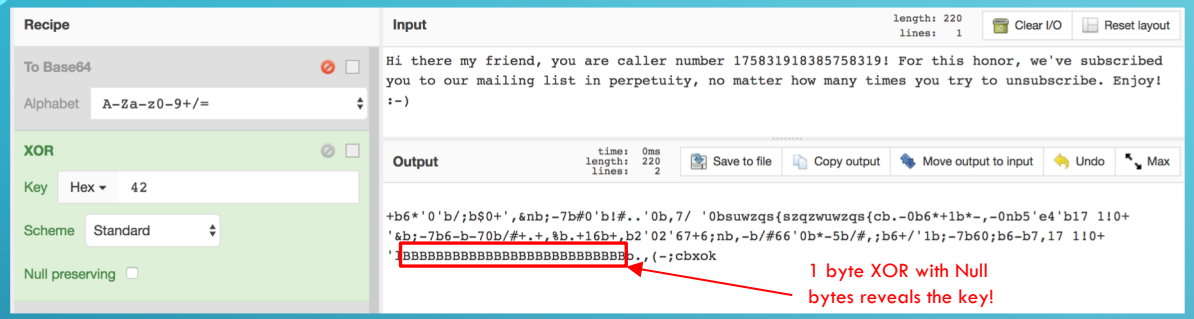

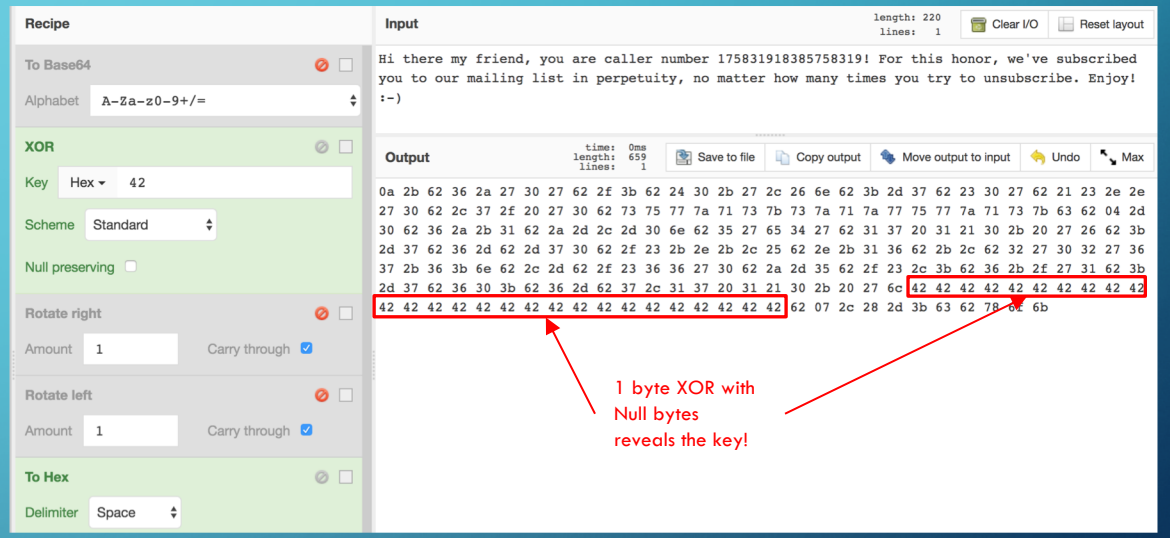

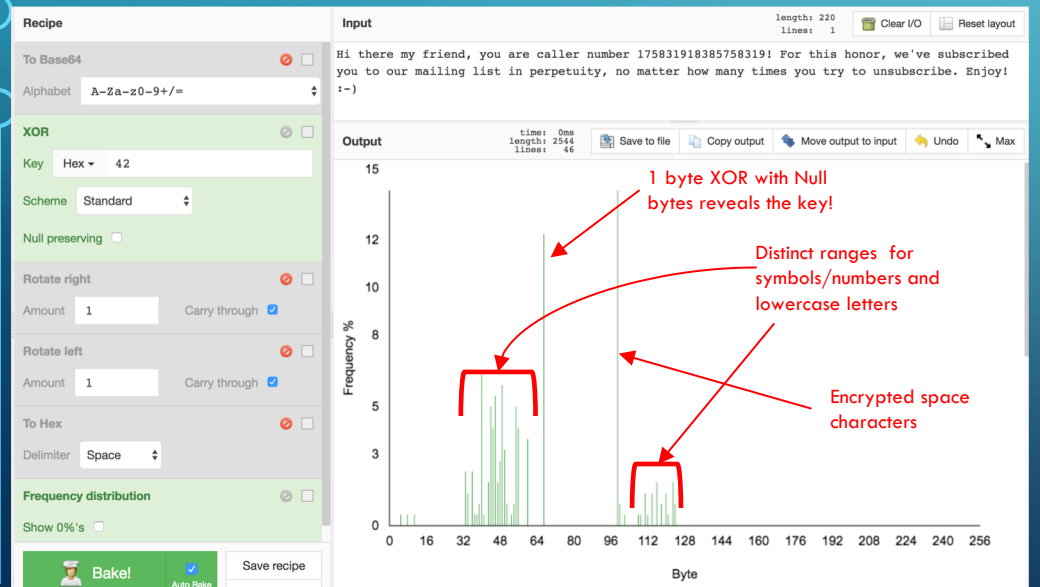

REASONING ABOUT THE DATA – FORMATS

- Recap
  - Repeated values often identify encoded/weakly-encrypted data
    - This behavior appears in most schemes, though
  - Human-readable data…
    - when encoded with RLC1 is unreadable data
    - when encoded with RRC1 is a mix of numbers, symbols, and unreadable data
    - when Base64-encoded often has padding bytes at end of data, very specific and few symbols, and the frequency chart looks like 1 big range
    - when 1 byte XOR-encrypted can spill the key when XORed with Null bytes


REASONING ABOUT THE DATA – FORMATS

- Reversing the encoding
  - Using packet 27, try to discover how it was encoded
    - CyberChef is your friend!



REASONING ABOUT THE DATA – HEADERS/FOOTERS

- Every communication has structure

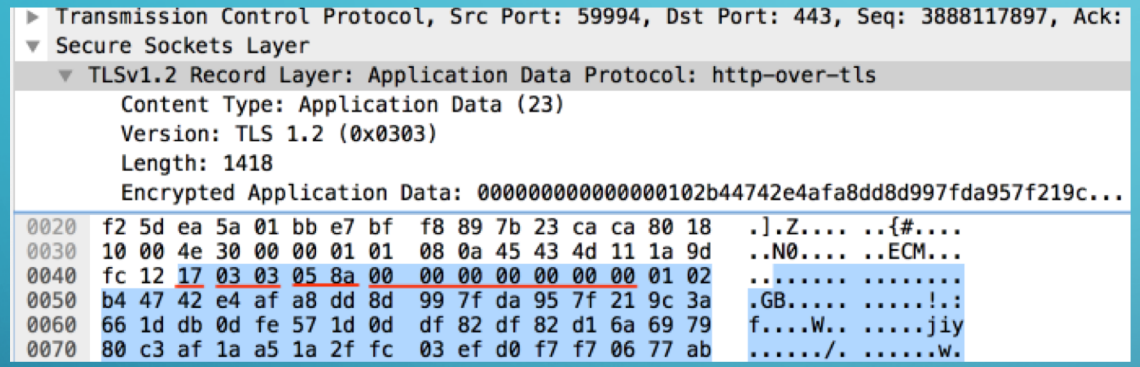


- Searching for constant bits/bytes
  - Where in the payload (front/back, elsewhere)?
  - Bytes that seem to correspond to payload length?
  - Any padding bytes?
  - Entropy of data?

REASONING ABOUT THE DATA – HEADERS/FOOTERS

- Hands-On
  - What bytes do packets 27, 28, and 30 have in common?
  - Notice any patterns in payloads?

BREAK TIME

- 10 minutes, then deep dive!

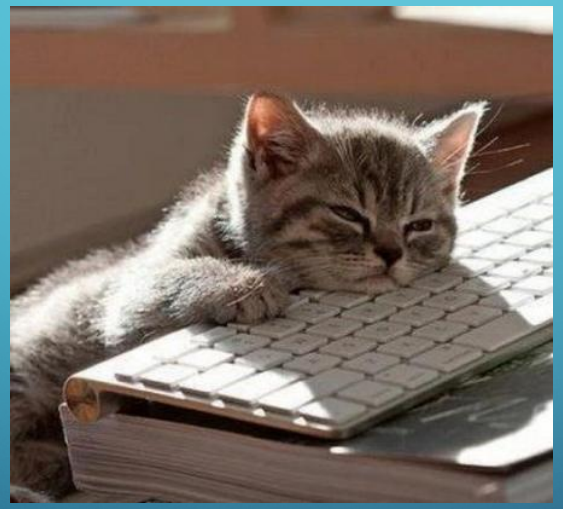

imgflip.com

INTER-PROTOCOL INTERACTIONS – FIRST-ORDER QUESTIONS

- Which IPs are involved? How? Who owns them?
- Transport-layer protocols? Beginning and ending time of sessions?
- Any known application-layer protocols?

INTER-PROTOCOL INTERACTIONS – SECOND-ORDER QUESTIONS


- Does a session begin only after another session ends? Other temporal relationships?

- Must any conditions be met for other aspects of communication to occur?




CROSS-PACKET FIELDS ANALYSIS

- Packets 27, 28, and 30 related to **one** endpoint…

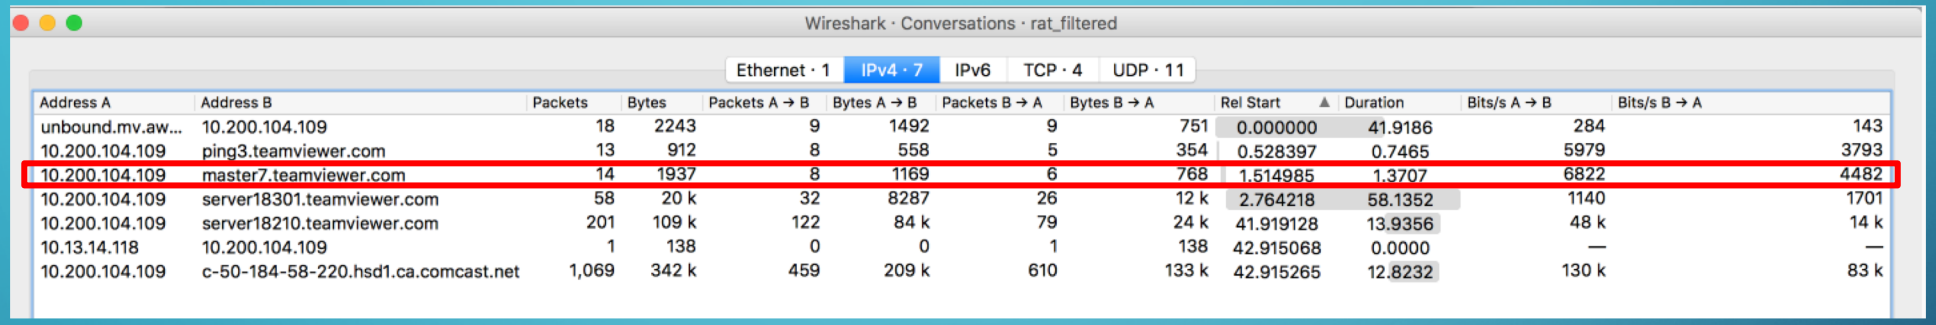

Address A	Address B	Packets	Bytes	Packets A → B	Bytes A → B	Packets B → A	Bytes B → A	Rel Start	Duration	Bits/s A → B	Bits/s B → A
unbound.mv.aw...	10.200.104.109	18	2243	9	1492	9	751	0.000000	41.9186	284	143
10.200.104.109	ping3.teamviewer.com	13	912	8	558	5	354	0.528397	0.7465	5979	3793
10.200.104.109	master7.teamviewer.com	14	1937	8	1169	6	768	1.514985	1.3707	6822	4482
10.200.104.109	server18301.teamviewer.com	58	20 k	32	8287	26	12 k	2.764218	58.1352	1140	1701
10.200.104.109	server18210.teamviewer.com	201	109 k	122	84 k	79	24 k	41.919128	13.9356	48 k	14 k
10.13.14.118	10.200.104.109	1	138	0	0	1	138	42.915068	0.0000	—	—
10.200.104.109	c-50-184-58-220.hsd1.ca.comcast.net	1,069	342 k	459	209 k	610	133 k	42.915265	12.8232	130 k	83 k

- What about the others?
  - Which packets/conversations have which header values?
  - Is data encrypted, encoded, plaintext?
  - Are there any bytes that look constant?
  - *Hint: Follow TCP/UDP Stream* is your friend!
  - Use tables I'm handing out to capture your thoughts

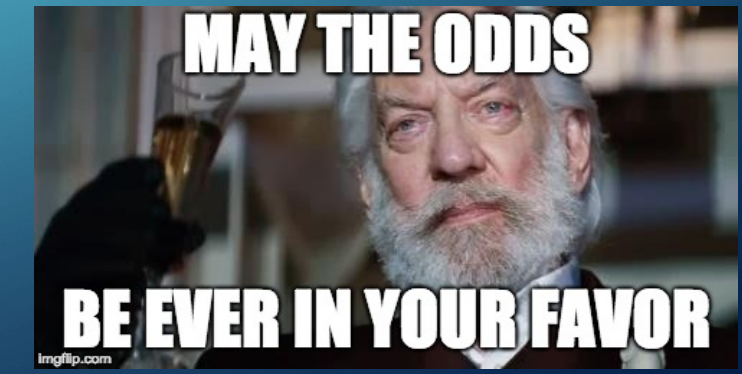

CROSS-PACKET FIELDS ANALYSIS

- Which packets/conversations have which header values?

Hosts Communicating	Header Values
10.200.100.5 (unbound) <-> 10.200.104.109	N/A (DNS only)
10.200.104.109 <-> ping3 (217.146.26.212)	
10.200.104.109 <-> master7 (178.77.120.102)	0x1724[1B_val][2B_payloadLen]
10.200.104.109 <-> server18301 (50.22.136.98)	
10.200.104.109 <-> server18210 (169.54.137.94)	
10.13.14.118 <-> 10.200.104.109	
10.200.104.109 <-> comcast IP (50.184.58.220)	

CROSS-PACKET FIELDS ANALYSIS

- Is data encrypted, encoded, plaintext?

Hosts Communicating	Encrypted/Encoded/Plaintext
10.200.100.5 (unbound) <-> 10.200.104.109	N/A (DNS only)
10.200.104.109 <-> ping3 (217.146.26.212)	
10.200.104.109 <-> master7 (178.77.120.102)	Encoded
10.200.104.109 <-> server18301 (50.22.136.98)	
10.200.104.109 <-> server18210 (169.54.137.94)	
10.13.14.118 <-> 10.200.104.109	
10.200.104.109 <-> comcast IP (50.184.58.220)	

CROSS-PACKET FIELDS ANALYSIS

- Are there any other bytes that look constant?

Hosts Communicating	Other Constant Bytes
10.200.100.5 (unbound) <-> 10.200.104.109	N/A (DNS only)
10.200.104.109 <-> ping3 (217.146.26.212)	
10.200.104.109 <-> master7 (178.77.120.102)	Encoded digits and “~”…anything else?
10.200.104.109 <-> server18301 (50.22.136.98)	
10.200.104.109 <-> server18210 (169.54.137.94)	
10.13.14.118 <-> 10.200.104.109	
10.200.104.109 <-> comcast IP (50.184.58.220)	

CROSS-PACKET FIELDS ANALYSIS

- Identifying participants in the communication
  - Because we don't have days to analyze this data, I'm including a list of highly-interesting packets: 43, 55, 65, 95, 98, 152, 154, 155, and 156. Based on what we've learned, attempt to identify some/all of the following information:
  - Names?
  - IPs?
  - IDs?
  - Versions?
  - Other info?

CUSTOM LUA PARSERS

- Install teamviewer_**unfinished**.lua script from here (directions) and reload Wireshark!
  - Filter on *teamviewer* in the display filter
  - How did we do?

WHY IT ALL MATTERS



imgflip.com

- Privacy concerns (OS/ID/pub_and_private_IP/MAC leak)
  - TeamViewer infrastructure would have this info for both sides, allowing very positive ID
  - Anyone sniffing traffic would also know this information
- Attribution starting points (IPs sure, but unique IDs and MACs yes)
- Stakeholder understanding
- Binary RE not always needed!

APPLYING TECHNIQUES ELSEWHERE

- Focused: dozens of RATs, several using very similar behaviors
- Identification of key aspects of communication even when it's "invisible"
- Day-to-Day Benefits
  - Unparsed data happens all the time, even with the most sophisticated tools
  - Have done on-the-fly RE of several protocols on the wire
  - It pays to be inquisitive!

OPTIONAL HOMEWORK – EXTENDING CUSTOM LUA PARSERS

- Open the unfinished lua script
  - Disclaimer: I'm not a "real" programmer…I hack things together
  - Search for *function ctwt_proto* and *function udpfc_proto*
- Using the Wireshark capture, knowledge we've learned in our RE work, and other functions in the script, complete these two functions.

QUESTIONS?

- Email: david@awakesecurity.com
- Twitter: @davidp0508
- LinkedIn
- Awake Blog

Thank You!

SOURCES

- Cyberchef
- Wireshark
- Lua
- Daniel Meissler's encryption page
- Braden Thomas (started TeamViewer script back in 2013)